

Thermal-magnetic and magnetic motor CB type GV2

Dùng cho CB từ nhiệt & CB từ loại GV2



Unit price (incl.VAT) in VND

**Contact blocks - tiếp điểm phụ**

Description	Mounting	Type of contacts	Sold in lots of	Reference	Unit price
Instantaneous auxiliary contacts	Front (1)	N/O or N/C	10	<b>GVAE1</b>	167,200
		N/O + N/C	10	<b>GVAE11</b>	206,800
		N/O + N/O	10	<b>GVAE20</b>	206,800
	Side	N/O + N/C	1	<b>GVAN11</b>	240,900
	(LH)	N/O + N/O	1	<b>GVAN20</b>	240,900
Fault signalling contact + instantaneous auxiliary contact	Side (LH)	N/O (fault) +N/O +N/C	1	<b>GVAD1010</b>	260,700
		N/C (fault) +N/O	1	<b>GVAD1001</b>	260,700
		+N/C	1	<b>GVAD0110</b>	260,700
Short-circuit signalling contact	Side (LH)	C/O common point	1	<b>GVAM11</b>	338,800

**Combination blocks - phụ kiện kết nối**

Description	Application	Type	Pitch (mm)	Reference	Unit price
Sets of 3-pole	Combination of	2 tap-offs	45	<b>GV2G245</b>	191,400
63A comb busbar mounting on the same DIN rail	Motor circuit breakers	3 tap-offs	45	<b>GV2G345</b>	248,600
			54	<b>GV2G354</b>	212,300
		4 tap-offs	45	<b>GV2G445</b>	294,800
			54	<b>GV2G454</b>	278,300
			72	<b>GV2G472</b>	364,100
Combination block between contactors and Motor CBs	Between GV2 and contactors LC1K, LP1K			<b>GV2AF01</b>	70,400
	Between GV2 and contactors LC1D09...D38			<b>GV2AF3</b>	128,700
	Between GV2 mounted on DIN rail and contactors LC1D09...D38			<b>GV2AF4</b>	140,800

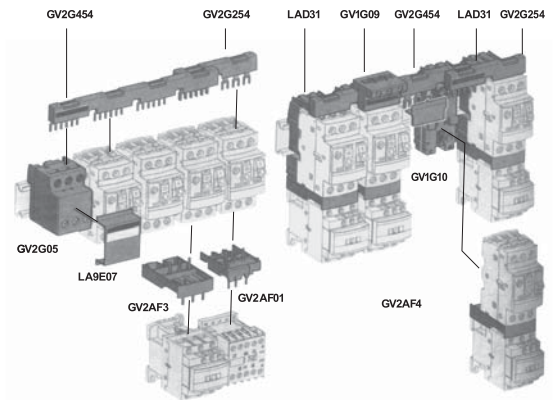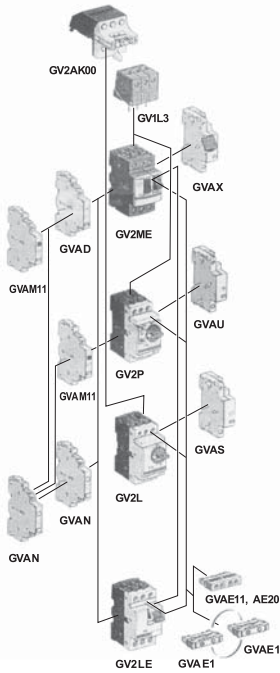

3 Pole thermal-magnetic circuit breaker  
Specially designed for the control and protection motors  
Standard power ratings of 3 phase motors 50/60 Hz in category AC-3  
On-Off-Trip indicator by rotary knob

CB 3 cực - từ & từ nhiệt bảo vệ động cơ  
Thiết kế chuyên biệt cho động cơ  
Công suất thiết kế tương ứng cho động cơ 3 pha - tải AC-3  
Chỉ thị trạng thái - ON -OFF- TRIP bằng núm xoay

Unit price (incl.VAT) in VND




GV3P40

**GV3-P : Thermal-magnetic CB control by rotary knob, breaking capacity at 400V - CB từ nhiệt dạng núm xoay**

400/415 V	Icu (kA)	Ics (% of Icu)	Setting Range of Thermal Trips	(1)	Unit price
5.5	100	50	9 ... 13	GV3P13	3,180,100
7.5	100	50	12 ... 18	GV3P18	3,327,500
11	100	50	17 ... 25	GV3P25	3,425,400
15	100	50	23 ... 32	GV3P32	3,536,500
18.5	50	50	30 ... 40	GV3P40	3,638,800
22	50	50	37 ... 50	GV3P50	3,819,200
30	50	50	48 ... 65	GV3P65	4,009,500

**GV3-L : Magnetic CB control by rotary knob, breaking capacity at 400V - CB từ dạng núm xoay**

400/415 V	Icu (kA)	Ics (% of Icu)	Magnetic protection rating (A)	(1)	Unit price
11	100	50	25	GV3L25	3,174,600
15	100	50	32	GV3L32	3,511,200
18.5	50	50	40	GV3L40	3,735,600
22	50	50	50	GV3L50	4,107,400
30	50	50	65	GV3L65	4,295,500



GV3G66

**GV3- Accessories - Phụ kiện kết nối**

Description	Mounting	Max No.	Type of contacts	Reference	Unit price
Contact block by screw	Front	1	N/O (fault) + N/O	GVAED101	149,600
Contact block by spring terminal	Front	1	N/O (fault) + N/C	GVAED011	149,600
3 breakers Power Busbar			N/O (fault) + N/O	GVAED1013	157,300
Cover "Large spacing"			N/O (fault) + N/C	GVAED011	149,600
IP20 Cover				GV3G364	942,700
			For use with (GV3P ●●, GV3L ●●)	GV3G66	237,600
			For use with (GV3P ●●)	LAD96570	237,600
			For use with (GV3P ●● 6, GV3L ●●6)		

(1) Notes - Lưu ý

To order these circuit-breakers with connection by lugs, add the digit 6 to the end of reference

**Example:** GV3L32 becomes GV3L326 or GV3P32 becomes GV3P326

Để đặt hàng các CB này có kiểu nối dây dạng đầu cắm, thêm số 6 vào cuối mã sản phẩm.

Ví dụ: GV3L32 trở thành GV3L326 hay GV3P32 trở thành GV3P326.